

MONO 200-220 Watt



Recommended For



Residential roof



Commercial roof



Mounted ground



Highest Module Conversion Efficiency 17.23%

Through superior cell technology and leading manufacturing capability



Easy Installation and Handling

With perfect compatibility to industry standard inverters and mounting systems



Excellent Weak Light Performance

Excellent performance under low light environments



Withstand High Wind and Snow Loads

Entire module withstand strong wind-pressure(2400Pa) and snow load(5400Pa)



Authoritative PV Standards

Conform with PV standards: IEC61215, IEC61730, MCS and UL1703



QC System: ISO9001

Processes comply with ISO9001 ensures Zero Defect

Warranties

10 years

Manufacturing warranty

12 years

90% output power warranty

25 years

80% output power warranty



Qualifications & Certificates

CE, UL 1703, IEC 61215, IEC 61730, MCS, CEC Australia,
ISO 9001, ISO 14001, RoHS



MONO 200-220 Watt

Electrical Data at STC	TPS-M200	TPS-M205	TPS-M210	TPS-M215	TPS-M220
Maximum Power (Pmax)	200W	205W	210W	215W	220W
Power Tolerance	0 to 5W				
Efficiency of Module	15.67%	16.06%	16.45%	16.84%	17.23%
Optimum Operation Current (Imp)	5.22A	5.34A	5.45A	5.57A	5.68A
Optimum Operation of Voltage (Vmp)	38.30V	38.40V	38.51V	38.62V	38.73V
Short Circuit Current (Isc)	5.70A	5.75A	5.79A	5.84A	5.96A
Open Circuit Voltage (Voc)	46.10V	46.20V	46.31V	46.42V	46.53V

Values at Standard Test Conditions STC (Air mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Thermal Characteristic

Nominal operating cell temperature (NOCT)	45±2°C
Temperature coefficient of Pmax	-0.40%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

Operating Conditions

Max. system voltage	1000VDC (IEC), 600VDC (UL)
Max. series fuse rating	10A
Operating temperature range	-40 to 85°C
Max. static load, front (e.g., snow and wind)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter/velocity)	25mm/23m/s

Construction Materials

Front cover (material/type/thickness)	low-iron tempered glass/3.2mm
Cell (quantity/material/type/dimensions)	72/monocrystalline/125mm×125mm
Encapsulant (material)	ethylene vinyl acetate (EVA)
Frame (material/color/anodization color)	anodization aluminum alloy/silver/clear
Junction box (protection degree)	TUV certified/IP65
Cable (length/cross-sectional area)	900m/4.0mm ²
Plug connector (type/protection degree)	MC4/IP67
Number of bypass diodes	3 pieces


General Characteristics

Dimensions (L/W/H)	1580mm×808mm×35mm
Weight	14±0.5kgs


Packaging Specifications

Container	20'GP	40'GP	40'HQ
Number (modules×pallets)	28×12	28×28	31×28

Dimensions of Module

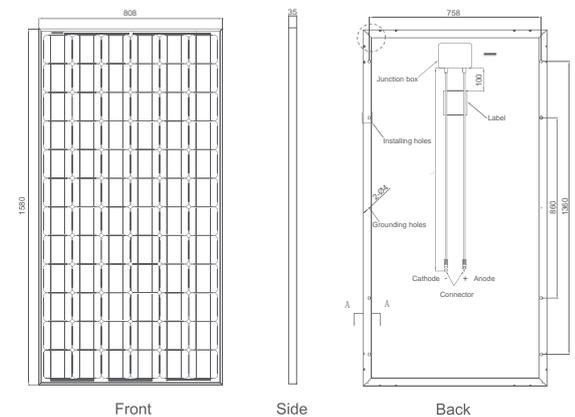

I-V Curves of Module

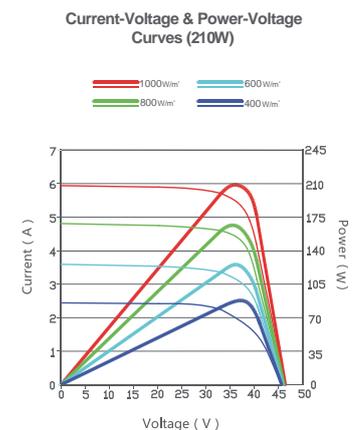

Distributor informations: